

## DS-8632NI-I8(B) Series NVR

### Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Up to 32-ch IP camera inputs
- Up to 1-ch@32 MP/2-ch@12 MP/32-ch@1080p decoding capacity
- Up to 320 Mbps incoming bandwidth
- HDD hot swapping with RAID 0/1/5/6/10



### Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

### HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

### Storage and Playback

- Hot-swappable HDD with configurable RAID 0, RAID 1, RAID 5, RAID 6 and RAID 10 storage scheme
- Up to 8 SATA interfaces for HDD connection
- 32-ch synchronous playback

### Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting
- POS information overlay on live view and playback, and POS triggered recording and alarm

### Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in




## Specification


<b>Model</b>	<b>DS-8632NI-I8(B)</b>
<b>Video and Audio</b>	
<b>Processor</b>	Quad-core embedded processor
<b>Operating System</b>	Embedded Linux
<b>IP video input</b>	32-ch
	Up to 12 MP resolution 32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF *: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled. For DS-8632NI-I8, when ultra HD resolution mode is enabled, it will reduce the IP video input to 24-ch.
<b>Incoming bandwidth</b>	320 Mbps
<b>Outgoing bandwidth</b>	256 Mbps
<b>Incoming bandwidth (RAID mode)</b>	200 Mbps
<b>Outgoing bandwidth (RAID mode)</b>	200 Mbps
<b>HDMI 1 output Display Resolution</b>	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>HDMI 2 output Display Resolution</b>	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>VGA 1 output Display Resolution</b>	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>VGA 2 output Display Resolution</b>	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>Video output mode</b>	HDMI 1 and VGA 1 provide simultaneous video output, and work as the main output; HDMI 2 and VGA 2 provide simultaneous video output, and work as the auxiliary output
<b>CVBS output (optional)</b>	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
<b>Audio output</b>	2-ch, RCA (Linear, 1 KΩ)
<b>Two-way audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)
<b>Video Monitoring Software</b>	Pre-Loaded Hikvision NVR Software
<b>Monitoring Software</b>	iVMS 4200, Hik Central, Hik Pro Connect Mobiles APPs (iOS, Android)
<b>Third Party Compatibility</b>	Support ONVIF (Profile S, Profile G & Profile T) camera's, Conformance for S & T.
<b>API</b>	ISAPI, SDK, Ehome
<b>Features</b>	Support motion detection, intrusion detection, Cross line detection, people counting, scene change, heat map, ANPR, Fast and easy to take backup
<b>Decoding</b>	
<b>Decoding format</b>	H.265+/H.265/H.264+/H.264/MPEG4
<b>Recording resolution</b>	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF 32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA

	/4CIF/DCIF/ 2CIF/CIF/QCIF *: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled. For DS-8632NI-I8, when ultra HD resolution mode is enabled, it will reduce the IP video input to 24-ch.
<b>Synchronous playback</b>	16-ch
<b>Video Playback Capability</b>	1-ch@32 MP (30 fps)/2-ch@12 MP (20 fps)/4-ch@8 MP (25 fps)/8-ch@4 MP (30 fps)/32-ch@1080p (30 fps)
<b>Video Playback Speed</b>	1X, 2X, 4X, 8X, 16X
<b>Dual stream recording</b>	Support
<b>Stream type</b>	Video, Video & Audio
<b>Audio compression</b>	G.711ulaw/G.711alaw/G.722/G.726
<b>Security</b>	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS 1.2, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, TLS1.2
<b>Network</b>	
<b>Remote connections</b>	128
<b>Network protocol</b>	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, SNTP, RTP, RTSP, RTCP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP, HTTP, HTTPS, DHCP
<b>Network interface</b>	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
<b>RAID</b>	
<b>RAID Type</b>	RAID0, RAID1, RAID5, RAID6, and RAID10 (at least 4 TB for each HDD)
<b>Auxiliary Interface</b>	
<b>Serial Interface</b>	RS-232; RS-485; Keyboard
<b>SATA</b>	8 SATA interfaces
<b>eSATA</b>	1 eSATA interface
<b>Capacity and HDD Type</b>	Up to 10 TB capacity for each disk, Surveillance & Enterprise.
<b>Alarm in/out</b>	16/4
<b>USB interface</b>	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
<b>General</b>	
<b>Power supply</b>	100 to 240 VAC, 50 to 60 Hz
<b>Consumption (without HDD)</b>	≤ 30 W
<b>Working temperature</b>	-10 °C to 55 °C (14 °F to 131 °F)
<b>Working humidity</b>	10% to 90%
<b>Dimension (W × D × H)</b>	445 × 470 × 94 mm (17.5"× 18.5" × 3.7")
<b>Weight (without HDD)</b>	≤ 8 kg (17.6 lb)
<b>Certification</b>	
<b>FCC</b>	Part 15 Subpart B, ANSI C63.4-2014
<b>CE</b>	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4
<b>UL</b>	UL 60950-1

## Dimension

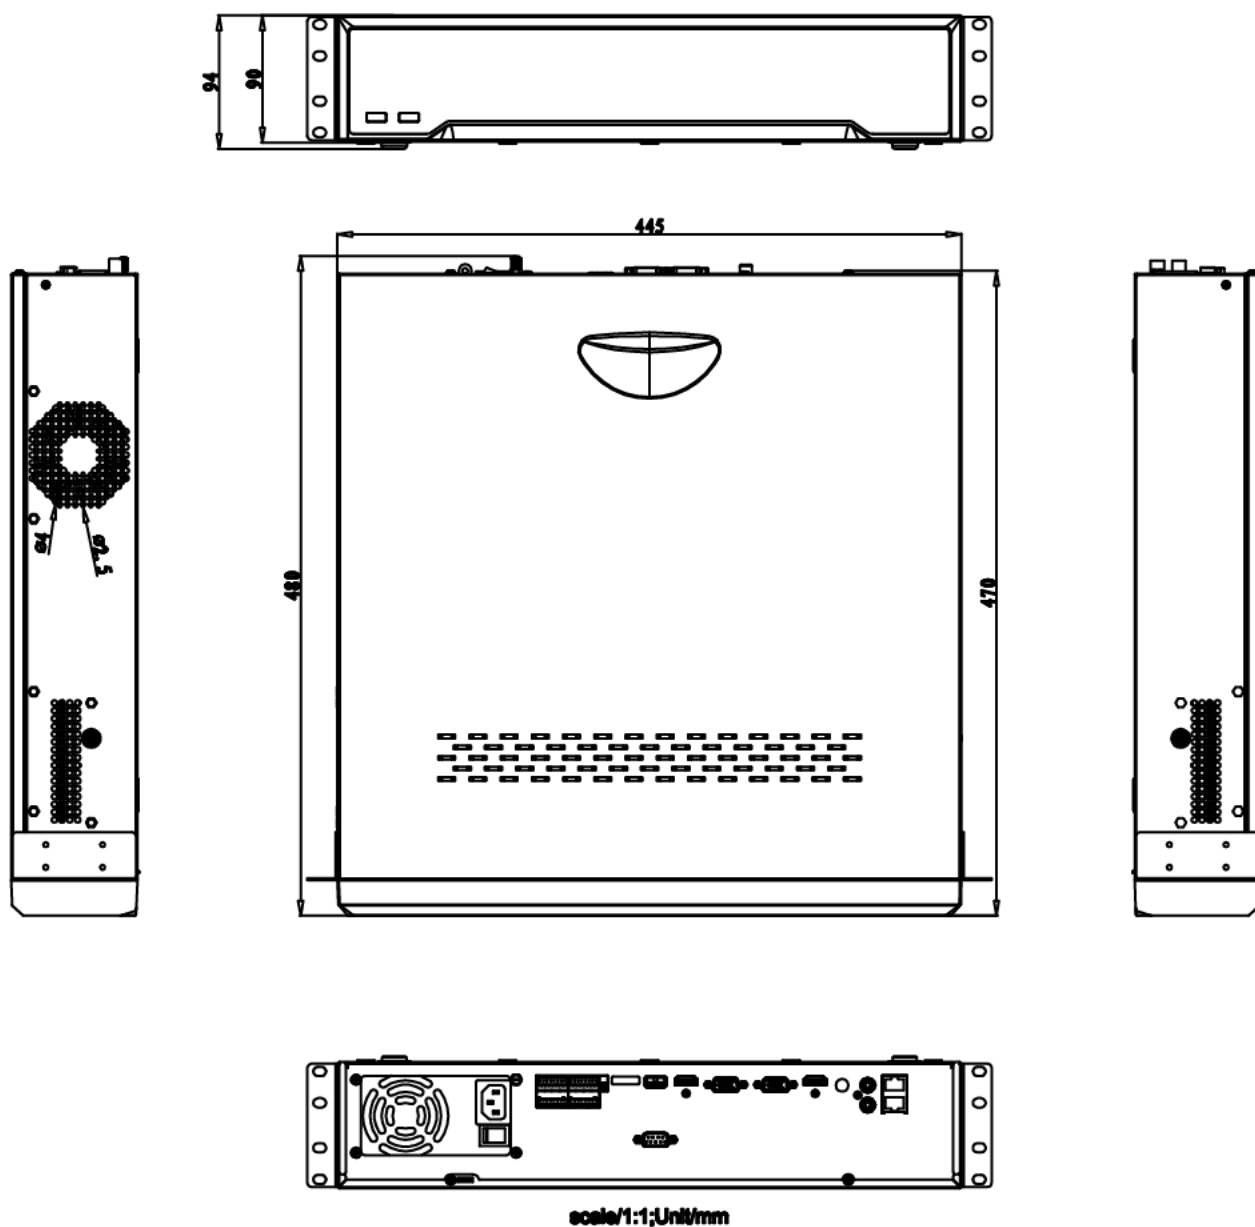

## Physical Interface

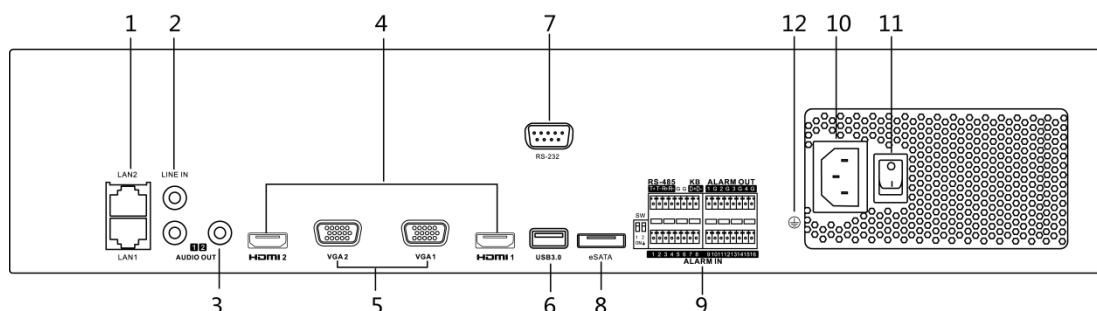

No.	Description	No.	Description
1	LAN1/LAN2 Interface	7	RS-232 Interface
2	LINE IN	8	eSATA Interface
3	AUDIO OUT	9	Alarm In/Alarm Out
4	HDMI1/HDMI2 Interface	10	100 to 240 VAC Power Supply
5	VGA1/VGA2 Interface	11	Power Switch
6	USB 3.0 Interface	12	GND

## Available Model

DS-8632NI-I8(B)  
DS-8616NI-I8(B)  
DS-8608NI-I8(B)

Distributed by

**HIKVISION**®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
sales.au@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (0) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
sales.me@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com

04400102001118