

XLS-CAB-5 SERIES

Cabinets with Locking Doors

XLS-CAB-5 series cabinets are customizable for specific system installation requirements.

XLS-CAB-5 cabinets for fire alarm control panels are fabricated from 16-gauge steel. The cabinet assembly consists of two basic parts: a backbox and a locking door. Cabinets are available in red, with or without windows. The window model provides a tasteful combination to accent the decor of the finest lobby setting.

A complete cabinet assembly consists of: a door, dress panels, a backbox, and an optional battery plate. For each cabinet required, order one "DR" door, one "SBB" backbox and dress panels. The BP-5 battery plate is required for each cabinet assembly that mounts batteries in the lower position of the cabinet unless a blank door is used.



XLS4000, shown with ACM-30 annunciators in a "B" size cabinet

FEATURES AND BENEFITS

- The **key-locked door** is provided with a pin-type hinge for easy door removal during installation, two keys, and the necessary hardware to mount the door to the backbox.
- The **backbox** has been engineered to provide ease-of-entry for the installer.
- **Knockouts** are positioned at numerous points to aid the installer in bringing a conduit into the enclosure with a minimum of hardship.
- **Right- or left-hand hinges**, selectable in the field. Door opens 120°.
- Cabinets are arranged in **five standard sizes**, A (one tier) through E (five tiers). See *Ordering Information*.

Honeywell

ORDERING INFORMATION

ONE TIER, “A” SIZE

XLS-DR-A5: Door assembly, window, one tier, red, 15 lbs.

XLS-DR-A5B: Door assembly, solid door, one tier, red, 18.5 lbs.

SBB-A5: Backbox assembly, one tier, black, 22.5 lbs.

TWO TIERS, “B” SIZE

XLS-DR-B5: Door assembly, window, two tiers, red, 21 lbs.

XLS-DR-B5B: Door assembly, solid door, two tiers, red, 25.5 lbs.

SBB-B5: Backbox assembly, two tiers, black, 29 lbs.

THREE TIERS, “C” SIZE

XLS-DR-C5: Door assembly, window, three tiers, red, 24 lbs.

XLS-DR-C5B: Door assembly, solid door, three tiers, red, 31 lbs.

SBB-C5: Backbox assembly, three tiers, black, 36 lbs.

FOUR TIERS, “D” SIZE

XLS-DR-D5: Door assembly, window, four tiers, red

XLS-DR-D5B: Door assembly, solid door, four tiers, red

SBB-D5: Backbox assembly, four tiers, black

FIVE TIERS, “E” SIZE

XLS-DR-E5: Door assembly, window, five tiers, red

XLS-DR-E5B: Door assembly, solid door, five tiers, red

SBB-E5: Backbox assembly, five tiers, black

ACCESSORIES

DP-T2A: Dress panel, mounts one 10 inch touchscreen display and two ACM-30 annunciators

DP-4A: Annunciator dress panel. Mounts four ACM-30 annunciators

DP-BLN: Blank dress panel, covers one CAB-5 tier, black

BP-5: Battery plate. Used to cover battery and power supply when lower position is used in backbox

DPA-C5: Audio dress panel for C5A-M, has openings for microphone, telephone and keypad

DPA-2A5: Audio dress panel for C5A-NW, has opening for keypad and mounts 2 annunciators

C5A-M: Audio chassis for mounting DVC and keypad, comes with microphone and well

C5A-NW: Audio chassis for mounting DVC and keypad

ABP-1: Blank plate for 1 ACM-30

CHS-CGW: Chassis for mounting the HON-CGW-MBB gateway

TELH-1: Firefighter's Telephone Handset for use with the DVC-EM when mounted in the C5A-M chassis


CAB-4 CONVERSION



CHS-ADP: Adapter plate for mounting CAB-4 Series chassis into CAB-5 Series backboxes

DP-4A-CB4: Dress panel, mounts 4 ACM-30s in a CAB-4 Enclosure

DP-T2A-CB4: Dress panel, mounts one 10" touchscreen display and two ACM-30 annunciators in a CAB-4 Enclosure

CABINET DIMENSIONS AND FEATURES

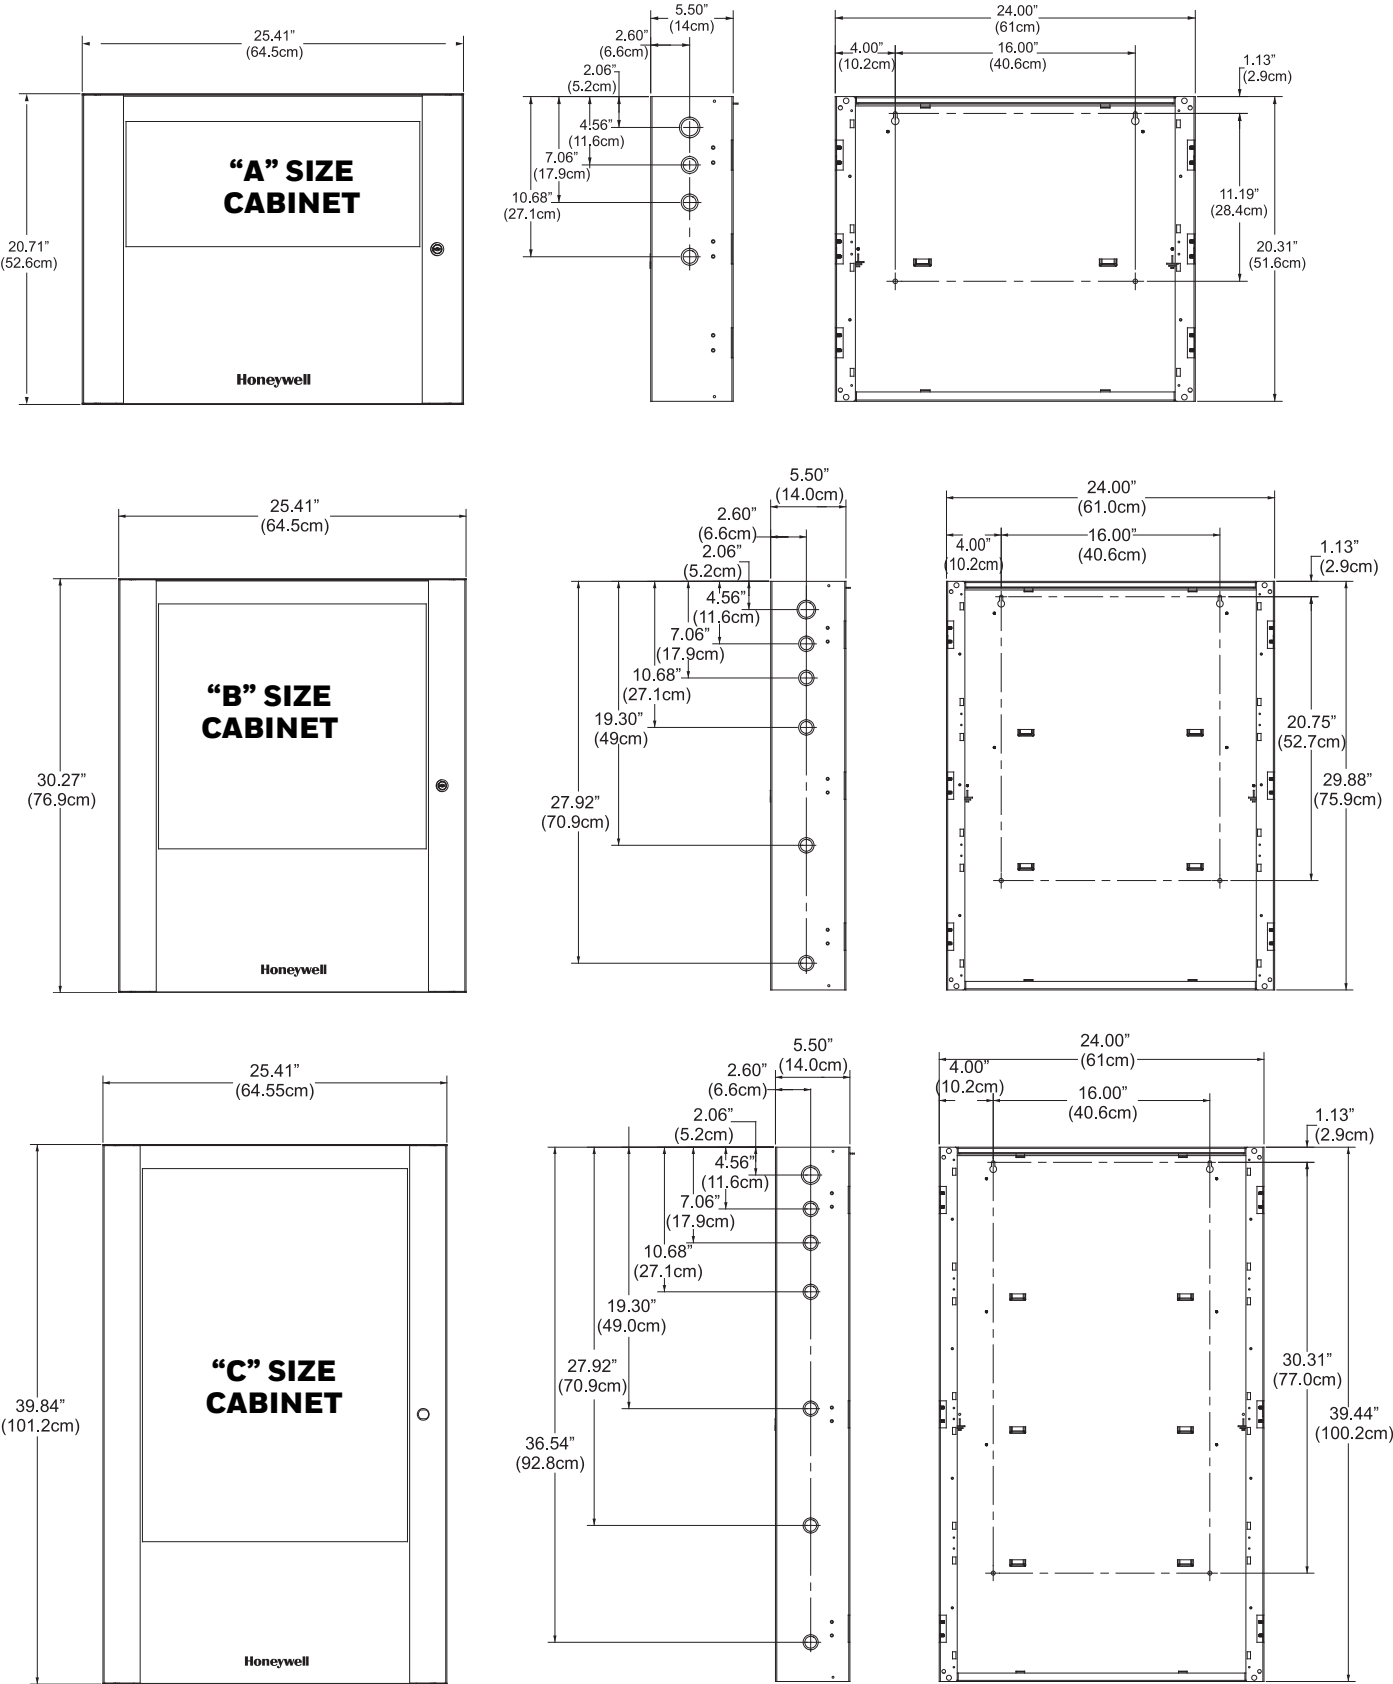

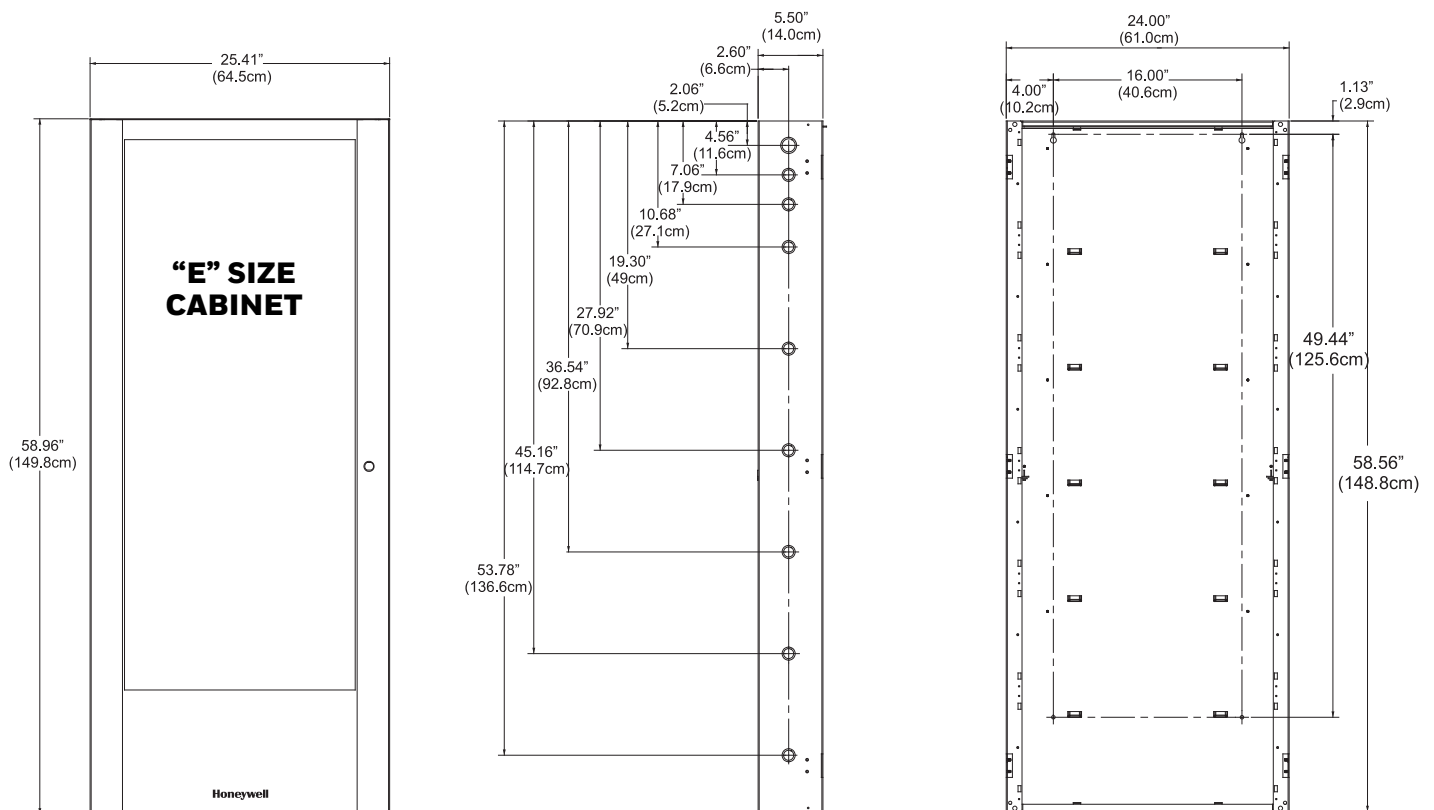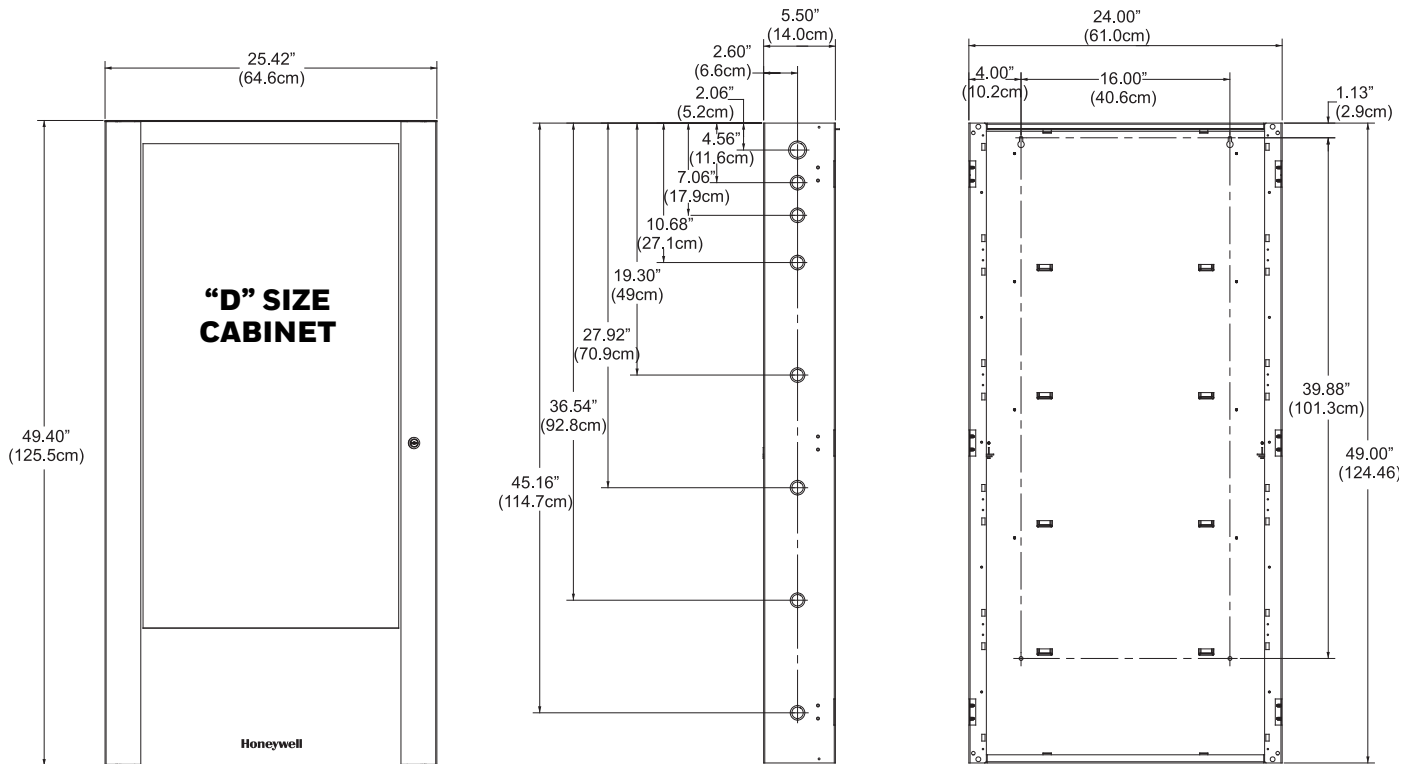

AGENCY LISTINGS AND APPROVALS

The file number(s) below reference the specific listings for the equipment in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult Honeywell for latest listing status.


- **UL Listed:** S470

STANDARDS AND CODES

These listings and approvals below apply to the XLS-CAB-5. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult Honeywell for latest listing status.

- UL 864, 10th edition
- NFPA 72 National Fire Protection Association

KNOCKOUTS ON TOP OF CABINETS

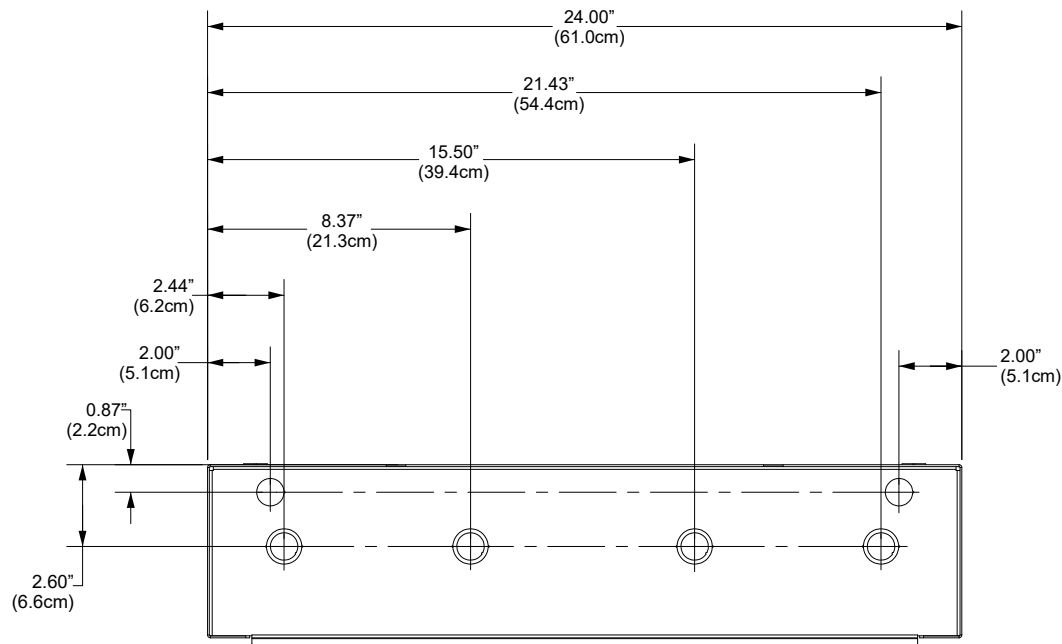

Honeywell® is a registered trademark of Honeywell International Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

Country of origin: USA

Honeywell Building Solutions

715 Peachtree Street NE
Atlanta, GA 30308
800.345.6770
www.honeywell.com

HON-62113 | A | 03/23
©2023 Honeywell International Inc.

THE
FUTURE
IS
WHAT
WE
MAKE IT

Honeywell