

DS-7616NXI-I2/S 16-ch 1U AcuSense 4K NVR



- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream
- Up to 8-ch facial recognition for face picture
- Up to 16-ch IP camera inputs
- Up to 32-ch 1080p decoding capability
- Up to 8-ch IP speakers can be connected

▪ Function

Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel IP cameras connection
- Compatible to third-party network cameras

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

Storage and Playback

- Up to 2 SATA interfaces for HDD connection
- 16-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Smart search for the selected area in the video, and smart playback to improve the playback efficiency
- POS information overlay on live view and playback
- POS triggered recording and alarm

Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management

▪ Specification

Intelligent Analytics	
AI by NVR	DS-7616NXI-I2/S: Facial recognition, perimeter protection, motion detection 2.0 DS-7616NXI-I2/S(标配)(E), DS-7616NXI-I2/S(中性)(E), DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD: Facial recognition, perimeter protection, motion detection 2.0, AcuSearch DS-7616NXI-I2/S(标配)(C), DS-7616NXI-I2/S(中性)(C), DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL, DS-7616NXI-I2/S(标配), DS-7616NXI-I2/S(中性): Facial recognition, perimeter protection, motion detection 2.0
AI by Camera	DS-7616NXI-I2/S: Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA DS-7616NXI-I2/S(标配)(C), DS-7616NXI-I2/S(中性)(C), DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL, DS-7616NXI-I2/S(标配), DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E), DS-7616NXI-I2/S(中性)(E): Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA
Engine	DS-7616NXI-I2/S: 1, engine mode is adjustable DS-7616NXI-I2/S(标配)(C), DS-7616NXI-I2/S(中性)(C), DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL, DS-7616NXI-I2/S(标配), DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E), DS-7616NXI-I2/S(中性)(E): 1, engine mode is adjustable
AcuSearch	
Performance	If the cameras support Hikvision AcuSense Technology and have enabled AcuSearch function, the NVR supports AcuSearch in all channels, capable of modeling 172,800 targets/day.
Perimeter Protection	
Human/Vehicle Analysis	DS-7616NXI-I2/S: N/A DS-7616NXI-I2/S(标配)(E), DS-7616NXI-I2/S(中性)(E): DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL, DS-7616NXI-I2/S(标配), DS-7616NXI-I2/S(中性): Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm DS-7616NXI-I2/S(标配)(C), DS-7616NXI-I2/S(中性)(C): Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm Up to 12 rules in total

By NVR	DS-7616NXI-I2/S:4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm; Up to 12 rules in total DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm; Up to 12 rules in total
By Camera	DS-7616NXI-I2/S:All channels DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels
Target Recognition	
Face Picture Library	DS-7616NXI-I2/S: Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB) DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB) DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 150 MB)
Face Picture Comparison	DS-7616NXI-I2/S:8-ch DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):8-ch DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):4-ch face picture comparison alarm
Facial Detection and Analytics	DS-7616NXI-I2/S:Face picture comparison, human face capture, face picture search Face picture comparison, human face capture, face picture search
Facial Detection and Analytics Performance	DS-7616NXI-I2/S:4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265) DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):1-ch human face capture (HD network camera, up to 8 MP , H.264/H.265) DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)
Motion Detection 2.0	
By NVR	DS-7616NXI-I2/S:All channels for Hikvision cameras DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels for Hikvision cameras

By Camera	DS-7616NXI-I2/S:All channels DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels
ANPR	
By Camera	DS-7616NXI-I2/S:All channels Support Countries & Regions: 1. Myanmar, Philippines, Indonesia, Vietnam, Pakistan, New Zealand, Australia, Sri Lanka, Singapore, Malaysia 2. Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, The United Kingdom, Ireland, Germany, Italy, Austria, Palestine, Latvia, Lithuania, Estonia, Belgium, Luxembourg, Ukraine, Uzbekistan, Kazakhstan, Mongolia, Moldova, Kyrgyzstan, Azerbaijan, Georgia, Armenia, Albania, Kosovo, Belarus, Cyprus, Denmark, Finland, Malta, Portugal, Romania, Slovenia, Sweden, Israel, Bosnia and Herzegovina, Turkmenistan, Montenegro, Serbia, Tajikistan, Iceland, Liechtenstein 3. Argentina, Brazil, Chile, Colombia, Peru, Ecuador, Paraguay, Uruguay, Salvador, Bolivia, Canada, Algeria, Mexico, Panama, Costa Rica, Nigeria, Kenya, Mauritius, Tanzania, Cote d'Ivoire, South Africa, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Republic of Trinidad and Tobago, Dominica, Guatemala, Senegal, Algeria, Cameroon 4. Qatar, Kuwait, Oman, Jordan, Lebanon, Iraq, United Arab Emirates, Saudi Arabia, Bahrain, Egypt, Libya DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels
Vehicle Attributes	DS-7616NXI-I2/S:Vehicle brand, vehicle color, vehicle type DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Plate number, license plate color, license plate type
Plate Attributes	DS-7616NXI-I2/S:Plate number, license plate color, license plate type DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Vehicle brand, vehicle color, vehicle type

Devices and Servers	
Heat Map Cameras	DS-7616NXI-I2/S:1.heatmap data record and presentation DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:N/A1.heatmap data record and presentation DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A
Video and Audio	
IP Video Input	DS-7616NXI-I2/S:16-ch DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):16 DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:16-ch Up to 32 MP resolution *: The NVR supports up to 4-ch 32/24/16 MP IP video inputs.
Incoming Bandwidth	160 Mbps
Outgoing Bandwidth	256 Mbps
HDMI Output	DS-7616NXI-I2/S:4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
VGA Output	DS-7616NXI-I2/S:1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):1920 × 1080/60 Hz
Video Output Mode	HDMI/VGA independent output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ)

Decoding	
Decoding Format	DS-7616NXI-I2/S: H.265+/H.265/H.264+/H.264 DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):H.265+/H.265/H.264+/H.264 DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中 性):H.265,H.265+,H.264,H.264+,MPEG4
Recording Resolution	DS-7616NXI-I2/S:32 MP/24 MP/16MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF *: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs. DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中 性):12MP/8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QC IF DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标 配)(E)/BRA/MAO/CKD:32 MP/24 MP/16MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF *: The NVR supports up to 4-ch 32/24/16 MP IP video inputs, all channels for less than 16 MP.
Synchronous playback	16-ch
Live View Window Division	DS-7616NXI-I2/S:1/4/6/8/9/16,1/2/4/6/8/9/16 DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):1/2/4/6/8/9/16 DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):1/4/6/8/9/16
Aux Port Window Division	DS-7616NXI-I2/S:1/4/6/8/9/16,1/2/4/6/8/9/16 DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):1/2/4/6/8/9/16 DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):1/4/6/8/9/16

Decoding Capability	DS-7616NXI-I2/S:Enable AI by NVR: 20-ch@1080p (30 fps) 1-ch@32 MP (30 fps); 1-ch@24 MP (30 fps); 2-ch@16MP (30 fps); 3-ch@12MP (30 fps);5-ch@8 MP (30 fps); 6-ch@6 MP (30 fps);8-ch@5 MP (30 fps);10-ch@4 MP (30 fps);16-ch@2 MP (30 fps); Disable AI by NVR: 32-ch@1080p (30 fps) 2-ch@32 MP (30 fps); 2-ch@24 MP (30 fps); 4-ch@16MP (30 fps); 5-ch@12MP (30 fps);8-ch@8 MP (30 fps); 8-ch@6 MP (30 fps); 12-ch@5 MP (30 fps); 16-ch@4 MP (30 fps); DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):16-ch @ 1080p (30 fps) DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Enable AI by NVR: 20-ch@1080p (30 fps) 1-ch@32 MP (30 fps); 1-ch@24 MP (30 fps); 2-ch@16MP (30 fps); 3-ch@12MP (30 fps);5-ch@8 MP (30 fps); 6-ch@6 MP (30 fps);8-ch@5 MP (30 fps);10-ch@4 MP (30 fps);16-ch@2 MP (30 fps); Disable AI by NVR: 32-ch@1080p (30 fps) 2-ch@32 MP (30 fps); 2-ch@24 MP (30 fps); 4-ch@16MP (30 fps); 5-ch@12MP (30 fps);8-ch@8 MP (30 fps); 10-ch@6 MP (30 fps); 12-ch@5 MP (30 fps); 16-ch@4 MP (30 fps);
Audio Compression	DS-7616NXI-I2/S:G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):G.711ulaw,G.711alaw,G.722,G.726,MP2L2 DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM
Dual-Stream Recording	Support
Stream Type	Video, Video & Audio
Network	
Network Interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Remote Connection	DS-7616NXI-I2/S:128 DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):128
Network Protocol	DS-7616NXI-I2/S:TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF (Version 2.2), OTAP DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS

API	DS-7616NXI-I2/S:ONVIF (profile S/G); SDK; ISAPI DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):ONVIF (profile S/G); SDK; ISAPI
Compatible Browser	DS-7616NXI-I2/S:IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Camera Access Protocol	ONVIF (Version 2.5), RTSP
Auxiliary Interface	
SATA	2 SATA interfaces
Capacity	DS-7616NXI-I2/S:Up to 16 TB capacity for each disk DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标 配)(E)/BRA/MAO/CKD:Up to 16 TB capacity for each disk DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):Up to 8 TB capacity for each disk
Serial Interface	DS-7616NXI-I2/S:N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E): DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):RS-485 (half-duplex), RS-232, Keyboard
Alarm In/Out	4/1
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
General	
GUI Language	DS-7616NXI-I2/S:English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew

Power Supply	DS-7616NXI-I2/S:100 to 240 VAC, 50 to 60 Hz DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):100 to 240 VAC, 50 to 60 Hz DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):≤ 40 W
Consumption	DS-7616NXI-I2/S:≤ 30 W (without HDD) DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):≤ 15W DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E): ≤ 30 W (without HDD)
Working Temperature	DS-7616NXI-I2/S:-10 °C to 55 °C (14 °F to 131 °F) DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):-10°C ~ + 55°C DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):-10° C to 55° C (14° F to 131° F)
Working Humidity	10% to 90%
Chassis	DS-7616NXI-I2/S:1U chassis DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):1U DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E): 1U chassis
Dimension (W × D × H)	DS-7616NXI-I2/S:385 × 317 × 52 mm (15.2"× 12.5" × 2.0") DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):385 × 317 × 52 mm (15.2"× 12.5" × 2.0") DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):385 × 315 × 52 mm (11.6"× 9.5" × 1.6")
Weight	DS-7616NXI-I2/S:≤ 2.5 kg (without HDD, 5.5 lb.) DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):≤ 2.5 kg (without HDD, 5.5 lb.) DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):≤ 1.6 kg (3.5 lb)
Certification	
Obtained Certification	DS-7616NXI-I2/S:CE, CB, REACH, WEEE, UKCA, LOA DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):CE, CB, REACH, WEEE, UKCA, LOA
CE	DS-7616NXI-I2/S:EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4 DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4


Cyber Security	
EN 303645	DS-7616NXI-I2/S:Support DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Support
Secure Boot	DS-7616NXI-I2/S:Support DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Support
Secure Component Verification SVC	DS-7616NXI-I2/S:Support DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Support
Password Protection	DS-7616NXI-I2/S:Support DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Support
IP & MAC Address Filtering	DS-7616NXI-I2/S:Support DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Support
HTTPS Encryption	DS-7616NXI-I2/S:Support DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Support
Live View & Playback Stream Encryption	DS-7616NXI-I2/S:Support : AES128 DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Support : AES128

IEEE802.1X(EAP-TLS) Network Access Control	DS-7616NXI-I2/S:Support DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Support
Signed Firmware	DS-7616NXI-I2/S:Support DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Support
Others	DS-7616NXI-I2/S:Digest authentication: Support User access log : Support Centralized certificate management : Support Brute force delay protection : Support DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Digest authentication: Support User access log : Support Centralized certificate management : Support Brute force delay protection : Support


▪ Typical Application

▪ Physical Interface

No.	Description	No.	Description
1	LAN1 and LAN2 network interfaces	6	USB 3.0 interface and VIDEO OUT
2	AUDIO IN//AUDIO OUT	7	Power supply
3	HDMI interface	8	GND
4	VGA interface	9	Power switch
5	ALARM IN/OUT		

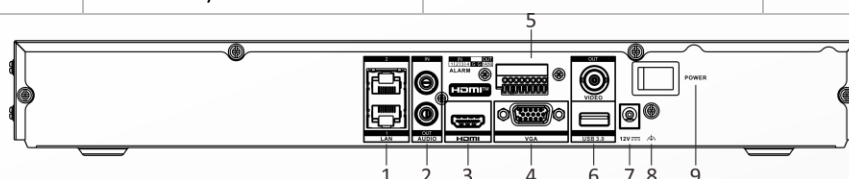

▪ Dimension

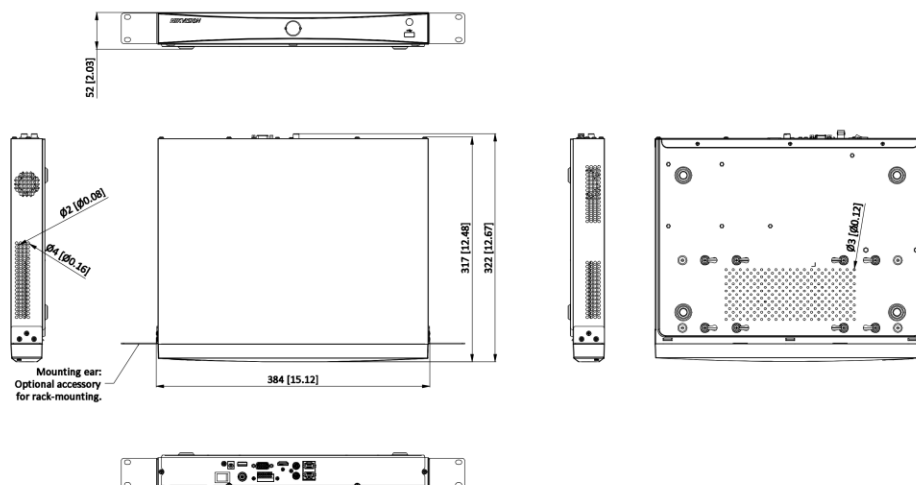

Unit:mm [inch]

SCALE	1:1
-------	-----

▪ Accessory

See Far, Go Further



www.hikvision.com
support@hikvision.com

