

HF-CSS1**Conventional Sounder Strobe**

The conventional sounder strobe is a kind of alarm equipment in fire alarm system. The device is installed in a public place, when the fire occurs, the device will send out sound and light alarm signals, warning personnel to evacuate to a safe place.

- Two-wire, convenient for construction wiring.
- Loud sound output, accompanied with bright alarm signal.


▪ Specification

General	
Weight	110g
Wiring	Two-wire, polarity free
Flash Frequency	1 Hz ~ 1.5 Hz
Modified Tone Period	4 s ~ 5 s
Monitor Current	≤500 uA
Alarm Current	≤5 mA
Key Feature	
dB SPL	75 dB ~ 100 dB
Bus Parameters	
Wiring requirements	RVS 2*1.5 mm ² Flame Retardant Wire, Max distance: 500 m

▪ Available Model

HF-CSS1

▪ Dimension

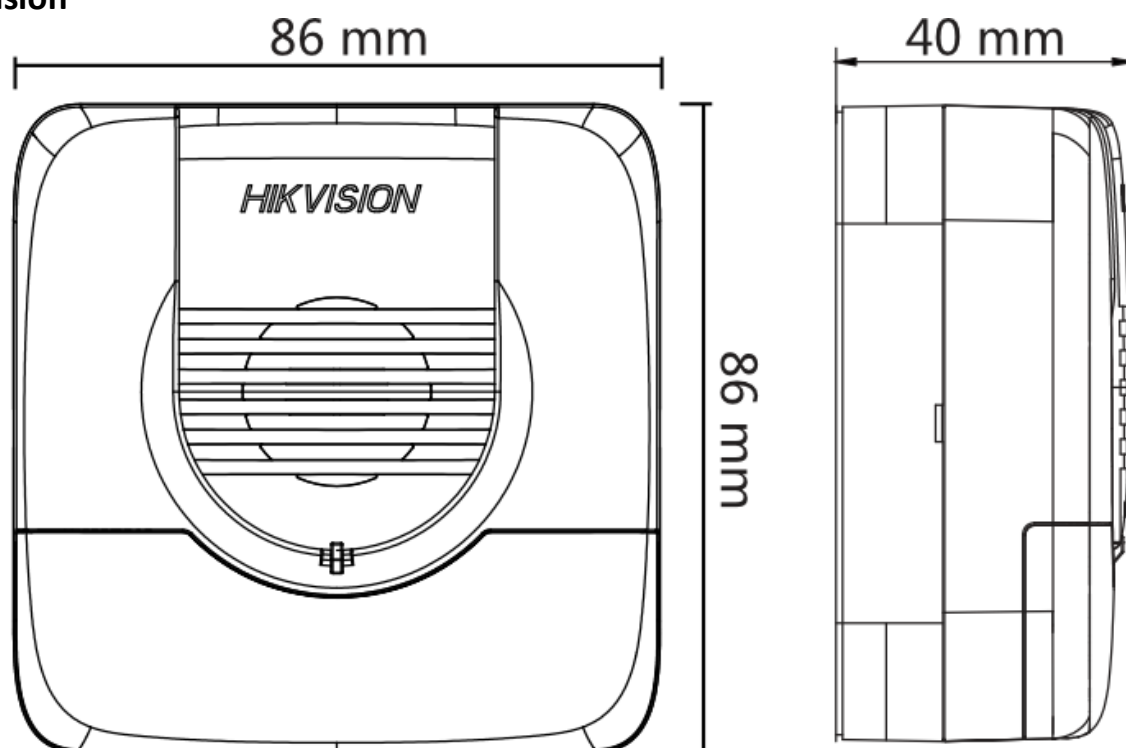

See Far, Go Further



www.hikvision.com
support@hikvision.com

